



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D06N 7/00, 3/06, 7/00, B29B 17/00, 17/00		A2	(11) International Publication Number: WO 99/40250
			(43) International Publication Date: 12 August 1999 (12.08.99)
(21) International Application Number: PCT/US99/02182 (22) International Filing Date: 3 February 1999 (03.02.99) (30) Priority Data: 60/073,718 4 February 1998 (04.02.98) US (71) Applicant: MANNINGTON MILLS, INC. [US/US]; Mannington Mills Road, P.O. Box 30, Salem, NJ 08079 (US). (72) Inventors: CHEN, Hao, A.; 40 Blue Stone Drive, Chadds Ford, PA 19317 (US). DESAI, Peter; 15 Ardmore Circle, Cartersville, GA 30120 (US). ZEREBECKI, Nicholas; 202 Teal Road, Mullica Hill, NJ 08062 (US). (74) Agent: KILYK, Luke, A.; Armstrong, Westerman, Hattori, McLeland & Naughton, Suite 1000, 1725 K. Street, N.W., Washington, Dc 20006 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.	
(54) Title: SURFACE COVERINGS CONTAINING FUSED RECYCLED MATERIAL AND PROCESSES OF MAKING THE SAME			
(57) Abstract			
<p>A backing or an intermediate layer for a surface covering is described which comprises a fused recycled material, wherein the material comprises a thermoplastic material, for instance, a vinyl material from a vinyl backed carpet or vinyl backed carpet manufacturing waste or both. Surface coverings containing the backing or intermediate layer of the present invention are also described as well as methods of making the backing or intermediate layer and methods of making the surface coverings containing the backing or intermediate layer of the present invention.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

SURFACE COVERINGS CONTAINING FUSED RECYCLED
MATERIAL AND PROCESSES OF MAKING THE SAME

BACKGROUND OF THE INVENTION

5 The present invention relates to backings for surface coverings, and more particularly relates to backings which contain recycled material as well as methods of making such products and incorporating them into surface coverings.

At the present time, most of the post-consumer vinyl backed carpets and carpet manufacturing waste go to landfills or are destroyed by other means such as burning. With the environment being of a global concern, the disposal of vinyl backed carpets and manufacturing waste which is currently done is not an acceptable option.

10 Further, recycling of vinyl backed carpets has been attempted but at most, manufacturers have taken recycled material and reduced it to liquid plastisol form in order to form a carpet backing with conventional coating and curing processes. However, such a process has limitations in that only very small amounts of recycled material can be incorporated into a plastisol mix, such as about 5% or less by weight, and because the oil absorption of recycled material is very high, high levels of plasticizers in plastisols are needed which can lead to further problems. With high levels of plasticizers and plastisols, further processing by conventional methods can become difficult, if not impossible.

Thus, there is a desire by manufacturers to develop ways to use recycled material like carpet backing, such that large amounts of recycled material can be incorporated into products.

20 **SUMMARY OF THE PRESENT INVENTION**

A feature of the present invention is to provide a material, e.g., a surface covering, that can contain up to 100% recycled material in one or more components or layers.

Another feature of the present invention is to provide a backing for a surface covering containing recycled material.

25 An additional feature of the present invention is to provide a surface covering containing a backing or intermediate layer which uses up to 100% recycled material.

- 2 -

A further feature of the present invention is to provide a method of making a backing from recycled material and incorporating the backing into surface coverings.

Additional features and advantages of the present invention will be set forth in part in the description which follows, and in part will be apparent from the description, or may be learned by the practice of the present invention. The objectives and other advantages of the present invention will be realized and attained by means of the elements and combinations particularly pointed out in the written description and appended claims.

To achieve these and other advantages and in accordance with the purposes of the present invention, as embodied and broadly described herein, the present invention relates to a backing or an intermediate layer for a surface covering which contains a fused recycled powder. The recycled powder contains at least a thermoplastic material and the backing or intermediate layer can optionally include other materials, including virgin thermoplastic materials.

The present invention further relates to a surface covering which contains the backing described above.

The present invention, in addition, relates to a method of making a backing or intermediate layer for a surface covering and includes the steps of applying at least recycled powder to a substrate to form a layer, where the recycled powder contains at least one thermoplastic material; and fusing the recycled powder to form a continuous backing or intermediate layer.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are intended to provide a further explanation of the present invention, as claimed.

The accompanying drawings, which are incorporated in and constitute a part of this application, illustrate embodiments of the present invention and together with the descriptions serve to explain the principles of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a flow chart showing one embodiment of a method of the present invention.

Figure 2 is a schematic drawing showing the various steps of making a surface covering which includes a backing containing recycled material.

Figures 3a-e are cross-sectional views of surface coverings according to several embodiments of the present invention.

5 DETAILED DESCRIPTION OF THE PRESENT INVENTION

The present invention relates to a backing (also known as a backing layer) and can be a secondary backing or an intermediate backing layer for a surface covering. In one embodiment, the backing layer or intermediate layer contains at least a fused recycled material. The recycled material contains at least one thermoplastic material. Various coatings or layers are discussed herein, and unless stated otherwise, are preferably of a substantially uniform thickness and can be applied using techniques known to those skilled in the art.

For purposes of the present invention, a surface covering can be any surface covering which makes use of a backing and/or intermediate layer, such as a floor covering, wall covering, ceiling covering, countertop covering, and the like. Examples of floor coverings include, but are not limited to, textile substrates, such as carpets, and resilient flooring, such as vinyl flooring or vinyl surface coverings. Particularly preferred examples of textile substrates are hard backed and cushion backed textile substrates. While the present invention will be described with respect to the preferred embodiment which is floor coverings, and in particular textile substrates and resilient flooring, the present invention can be applied to other types of surface coverings containing backing and/or intermediate layers in view of the disclosure herein.

Preferably, the textile substrate is a broadloom carpet, modular tile, or a wide roll carpet (e.g., 6 ft. wide). Most preferably, the textile substrate is tile or 6 ft. roll goods.

The textile substrate comprises textile fibers defining a fibrous face, a primary backing to which the textile fibers are secured, and a secondary backing secured to the primary backing. For purposes of the present invention, the term "textile substrate" relates to, but is not limited to, a fiber, web, yarn, thread, sliver, woven fabric, knitted fabric, non-woven fabric, upholstery fabric, tufted carpet, and piled carpet formed, from natural and/or synthetic fibers.

- 4 -

The backing or backing layer for purposes of the present invention can be any layer or substrate which has one or more additional layers adhered to a surface of the backing layer. Thus, the backing can be the layer which is in contact with the sub-surface, such as a sub-floor, or can be an intermediate layer with other layers above and below the intermediate backing layer.

5 The recycled material, preferably a powder, contains at least one type of thermoplastic material. The recycled powder used in the present invention is preferably a powder obtained from post-consumer products which contain at least one thermoplastic material. Preferably, the post-consumer product is a carpet and/or carpet manufacturing waste, and more preferably is a vinyl backed carpet and/or vinyl backed carpet manufacturing waste. Preferably, substantially no thermosetting material is part of the recycled material (e.g.
10 less than 5% by weight), and more preferably no thermosetting material is present with the recycled material.

 With regards to the backing material, for purposes of the present invention, the backing is a thermoplastic material. The thermoplastic material can be an aliphatic thermoplastic resin such as one derived by polymerization or copolymerization of an ethylenically unsaturated monomer. The monomer can be a
15 ethylenically unsaturated hydrocarbon such as an olefin or a nitrile (such as an acrylonitrile), vinyl or vinylidene chloride, vinyl acetate, or an acrylate, such as ethylacrylate or methylmethacrylate. More particularly, the thermoplastic material can be a polyethylene, ethylene/vinyl acetate, polyvinyl chloride, polyisobutylene, and the like. Preferably, the thermoplastic material is a vinyl-type material such as a vinyl
20 resin and more particularly a polyvinyl chloride-type material.

 Thermoplastic materials are not subject to chemical change when heated. Thermoplastic materials
20 are not infusible, consequently they will gel or soften when a solvent is applied. Suitable polymers for the backing layers of the present invention are derived from at least one monomer selected from the group consisting of acrylic, vinyl, chlorinated vinyl, styrene, butadiene, ethylene, butene, and copolymers or blends thereof. A preferred coating composition is a polymer or copolymer of a vinyl compound, e.g., polyvinyl
25 chloride, polyvinylidene chloride, polyethylene chloride, polyvinyl acetate, polyvinyl acetal, and the like, and copolymers and mixtures thereof. A specific example of a resin coating composition is a vinyl chloride, resin-based plastisol, wherein the plasticizer component of the plastisol is a phthalate-based compound, such as an alkyl phthalate substituted one or two times with a linear or branched C5-C12 alkyl group, which is included in an amount by weight equal to between about 15 to 60 percent of the weight of the vinyl chloride resin

component. Particular vinyl chlorides include Vinycel 124 (Policyd SA DE CV, Mexico), Geon Registered TM 13 oz (Geon Company, Cleveland, Ohio), Pliovic-70 (The Goodyear Tire and Rubber Company, Akron, Ohio), and Oxy 67SF (Occidental Chemical Corp., Dallas, Tex.). Particular alkyl phthalate plasticizers include Santicizer Registered TM 160 (Monsanto Company, Saint Louis, Mo.), Palatinol Registered TM 711P (BASF Corporation, Parsippany, N.J.), and Jayflex DHP (Exxon Chemical America, Houston, Tex.).

The backing can be a cushion-back or a hard back backing. In more detail, the backing can be a solid thermoplastic backing or a foamed thermoplastic backing. Preferably, the thermoplastic foamed backing is a foamed vinyl backing, and more preferably a polyvinyl chloride foamed backing, such as a closed-cell vinyl foamed backing. Generally, the backings will contain a sufficient amount of at least one blowing agent and plasticizer and can include other ingredients conventionally used in backings.

Chemically expanded thermoplastic foamed backings can be used as the secondary backing and can be prepared by casting a thermoplastic resin plastisol containing a blowing agent onto the back of the primary backing and heating to expand and fuse the plastisol. Alternatively, a pre-blown foamed secondary backing can be laminated, such as by heat, to the primary backing. The solid thermoplastic secondary backing can be similarly prepared by casting or by lamination.

Conventional blowing agents can be used and include, but are not limited to azodicarbonamide, oxybissulfonyl hydroxide, substituted thiazole, and the like such as the ones described in U.S. Patent No. 3,661,691 incorporated its entirety by reference herein.

The recycled powder is obtained from post-consumer products by subjecting the product, such as a vinyl backed product, to a process which reduces the post-consumer product into a number of pieces (e.g., chunks or granules) which can eventually be further reduced in size to form a powder. One operation that can be used to reduce, for instance, the vinyl backed carpet or vinyl backed manufacturing waste, to a suitable recycled powder is to first subject the carpet or waste to a face shear operation to remove at least a portion, if not most of the face fiber that may be present. While this step is an optional step, it is preferred that at least a portion of the face fiber, and even more preferably at least 50% of the face fiber, and even more preferably at least 75% of the face fiber, be removed to improve the end use purity of the recycled material which eventually will be formed into a surface covering backing layer. While there are various types of devices which can remove the face fibers, like pure nylon fiber, which may be attached to the vinyl backed carpet,

one preferred device is a shearing machine, such as one commercially available from Sellers, Inc., United Kingdom.

Whether or not any face fiber is removed from the vinyl backed carpet or vinyl backed manufacturing waste, the carpet or waste is then fed into a shredder which breaks down the carpet and waste into various pieces, chunks, or granules. The particular size of the pieces is not critical, so long as the carpet or waste is somehow "cut up" or formed into pieces so that the carpet or waste can eventually and preferably be reduced to powder form. Preferably, these chunks or granules have a diameter of about 4" or less, and more preferably have a diameter of about 3" or less, and most preferably have a diameter of about 2" or less. Preferably, the diameter range of these chunks or granules is from about 1" to about 2". One device that can be used to reduce the carpet and/or waste to such chunks or granules is a shredder, such as one commercially available from Nordfab, Inc., Model #1350K.

The chunks or granules are then reduced to a smaller size by subjecting them to any operation which can accomplish this purpose. For example, a granulator can be used; for instance, one available from Rapid Granulator, Model 3260 with a screen size of 1/4 inch, which can reduce the chunks or granules to a size of about 1/2" or less, more preferably about 3/8" or less, and most preferably about 1/4" or less. Preferably, the chunks or granules are reduced to a size of from about 1/2" to about 1/4", more preferably from about 3/8" to about 1/4". With the use of a granulator or similar device, the size of the resulting chunks or granules can be adjusted to any desired size and thus it is certainly within the bounds of the present invention to vary the size of the particles to sizes desired by the ultimate use of the recycled material.

The chunks or granules now reduced to a smaller size, are then optionally subjected to an operation which can separate substantially any existing fiber from the chunks or granules present. This fiber which may be present is generally face fibers and this operation preferably removes any low density fibers from the granules or chunks which are typically of a high density. One method of separating at least a portion of the fibers from the granules or chunks at this stage, is an aspirator using an air stream separation design. One machine capable of doing this separation is a KF-60 extended aspirator available from Kongskilde. In this optional step, it may be desirable to have a portion of the fiber remain with the granules or chunks of the recycled material or it may be desirable to remove almost all of the fiber, if not all of the fiber, depending upon the end use of the backing which will be formed from the recycled material.

- 7 -

The granules or chunks, which may have some fibers attached or present, are then preferably reduced in size to form a powder. Any means can be used to reduce the larger sized granules or chunks to a powder. Preferred ways of doing so is with the use of a grinder or cryogenic grinding process. If very fine powder is required for the particular end use, then a cryogenic grinding process is preferred which can be accomplished by spraying the granules or chunks of recycled material with liquid nitrogen and then subjecting the sprayed recycled material to a grinding process. The cryogenic process forms finer powder because of the brittleness of the material resulting from the liquid nitrogen treatment and because of the reduced agglomeration of the material during the grinding process. If the powder size is not as important, then an ambient grinding process can be used with any type of grinder such as a Wedco Therm-O-Fine UR-28 grinding system available from Wedco, Inc.. Any size of recycled material can be used in the backing or intermediate layer, so long as the material can take the form of a backing or intermediate layer by fusing, which will be described in more detail below. It is preferred that the recycled powder have a particle size of 3,000 microns or less and more preferably 1,000 microns or less. A preferred range of powder size would be from about 250 microns to about 1,500 microns, and a more preferred range would be from about 300 microns to about 900 microns. Figure 1 summarizes the preferred steps of making the recycled powder.

The recycled powder upon analysis typically contains at least one thermoplastic material, such as a vinyl-based material, and can also contain at least one plasticizer, at least one inorganic filler, at least one stabilizer, and generally a small amount of face fibers, such as nylon, polypropylene, polyester, and/or glass fibers. These fibers which may be present can assist as acting like a reinforcement fiber material in the backing layer once the recycled powder is fused.

The recycled material, preferably in powder form, which is formed can be used alone to form a backing or intermediate layer or can be mixed with other conventional ingredients, such as virgin thermoplastic material to form the backing or intermediate layer. Any combination of the recycled material with virgin material is possible. For instance, from about 1% by weight recycled material to about 100% recycled material can be used along with from about 0% virgin material to about 99% by weight virgin material to form a mixture which can ultimately be fused into a backing layer or intermediate layer. Preferably, when forming the final backing layer, a backing layer containing about 100% recycled material is preferred. When an intermediate backing layer is formed, it is preferred that at least 10% by weight virgin

- 8 -

thermoplastic material is also present with the recycled material, and more preferably at least about 50 % by weight virgin thermoplastic material is present along with the recycled material, and most preferably at least about 90 % by weight virgin thermoplastic material is present along with the recycled material.

5 Besides virgin thermoplastic material, other conventional ingredients can be present along with the recycled material to form a backing or intermediate layer, such as inorganic fillers, resins, plasticizers, stabilizers, foaming agents, blowing agents, and the like. The amount of any one of these ingredients can be the same as conventionally used by those skilled in the art in forming such layers. Since a foaming or blowing agent can be incorporated into the recycled material, a foam layer or cushion-backed layer can be formed with the recycled material of the present invention.

10 In forming the backing or intermediate layer, the recycled material, preferably powder, with or without additional ingredients or components, is applied onto a substrate in any manner in which powders can be applied to eventually form a continuous layer, which is preferably substantially uniform in thickness. The substrate can be a release paper, a felt, or preferably, the bottom surface of a primary backing or other layer in a carpet or other surface covering. Once the recycled powder with or without other ingredients or
15 components is applied, preferably in a uniform or substantial uniform fashion, the recycled material is fused to form a continuous layer. Fusing or fused, for purposes of the present invention, is understood to mean that the recycled material, preferably a powder, is not completely reduced to a liquid state, like liquid plastisol, but instead, is the joining of the individual particles or granules of the recycled material, in any manner, preferably with the application of heat, to form a continuous layer. Generally, some of the recycled particles
20 or granules, and preferably a majority, and most preferably over 90 % of the recycled particles or granules substantially maintain their identity as particles on a macroscopic level, but are part of the continuous layer. In one embodiment of the present invention, after the recycled material has been fused to form a continuous layer, visually, one can identify many of the individual recycled particles in the backing layer. The fusing of the recycled material is preferably with the application of heat and pressure. More preferably, the fusing
25 of the recycled material is accomplished with the use of a double-belt press such as one available from Schilling-Knobel of Germany.

With a double-belt press, the recycled material and any other layers of the surface covering travel

between a moving top belt and a moving bottom belt where heat is applied through each belt onto the recycled material. Generally, a heated platen is located above the top belt and below the bottom belt to provide the application of heat onto the belt and then onto the recycled material. This platen can also provide pressure onto the recycled material. Preferably, the heated platen provides up to about 100 psi and more preferably about 40 psi or less, and even more preferably about 0.1 psi to about 10 psi onto the recycled material. Most preferably, no pressure is applied onto the recycled material at this point. Preferably, any pressure that may be applied through the platens is at a consistent pressure. The temperature applied to the recycled material is generally a temperature sufficient to fuse the recycled particles of the recycled material together without causing any substantial melting of the recycled particles. The top belt is preferably maintained at a temperature of from about 215°C to about 220°C while the bottom belt which is the furthest away from the recycled material is preferably kept at a temperature of from about 110°C to about 130°C so as to avoid any damage to the other layers which may exist with the recycled material. Once the recycled material with or without other layers present is heated and fused, the material then preferably goes between two sets of nip rolls which apply a pressure of about 75 psi or less onto the material traveling on the belts and then the material goes through a cooling zone wherein cold water or other cooling medium is circulated through additional platens located above the top belt and below the bottom belt which cools the belt and cools the surface covering. Preferably, during the fusing stage, the pressure and temperature are held constant or substantially held constant. The material then can be rolled if desired onto a roller or fed into a cutter. Figure 2 depicts a preferred process of making the surface covering with the use of a double belt press.

In a more preferred embodiment, a surface covering, in this case, a hard backed carpet can be made as follows. Unbacked carpet is placed on an unwinding station where this unbacked carpet is fed face down on a moving belt preferably the bottom belt of a double-belt press. The unbacked carpet can be a primary backing with textile fibers extending upwardly from the backing and forming a surface. With the carpet face down on the bottom belt of the double-belt press, an adhesive or polymeric pre-coat is applied, for instance, by applying a dispersion grade or suspension grade thermoplastic resin onto the primary backing or unbacked carpet. This adhesive or polymeric pre-coat layer can be a 100% virgin dry blend or can be a mixture of virgin material along with recycled material. In lieu of a dry blend, a liquid grade resin can be applied as the adhesive or polymeric pre-coat layer. Preferably, a dry blend is applied. The adhesive or polymeric pre-coat

- 10 -

layer is applied in conventional amounts, but preferably the amount is from about 15 ounces per square yard to about 60 ounces per square yard. Preferably, the adhesive or polymeric pre-coat layer is a dry blend of at least one PVC resin, at least one plasticizer, and at least one stabilizer.

5 If the adhesive or polymeric pre-coat layer is a dry grade, the material along with the unbacked carpet is vibrated by a plate underneath the bottom belt which aids in the particles in the adhesive or polymeric pre-coat layer to fall between the fiber bundles and improves the dispersion of the particles on the unbacked carpet. The material can then be subjected to a process which will gel the adhesive or polymeric pre-coat layer, such as with the use of infrared heat. Then, a reinforcement material is applied onto the surface of the adhesive or polymeric pre-coat layer. Examples of reinforcement materials include, but are not limited to,
10 a non-woven material or woven material, such as a non-woven fiber glass mat or fleece and the like. This reinforcement material is generally placed on the surface of the adhesive or polymeric pre-coat layer while the layer is still in a liquid or gel state. Prior to or after the reinforcement material is applied, an intermediate layer can be applied.

The intermediate layer can be formed from 100% recycled material or can contain lesser amounts of
15 the recycled material or can contain 100% virgin material. Preferably, the intermediate layer contains at least 50% virgin material and more preferably at least 75% virgin material and most preferably at least 90% virgin material with the remaining balance being substantially recycled material. This intermediate backing layer is also an optional layer and can be made from the same material as the secondary backing layer. Preferably, the intermediate backing layer is a hard backed and is not a foamed layer. The intermediate layer is preferably
20 a thermoplastic material and more preferably is a polymer or copolymer of a vinyl compound, such as polyvinyl chloride. The intermediate backing layer is preferably applied in the form of a dry blend but can be applied as a liquid coating. The intermediate backing layer whether applied as a dry blend or as a liquid coating can be applied in the manners conventionally known to those skilled in the art. Preferably, the amount of intermediate layer applied is an amount of from about 10 oz/yd² to about 150 oz/yd².

25 Once the reinforcement material is applied, the carpet can then be subjected to a suitable pressure to create a good bond between the individual fibers and/or yarns the adhesive or polymeric or pre-coat layer as well as the reinforcement material with the pre-coat layer. An application of pressure of this sort can be applied by a pressure roller or other suitable device.

- 11 -

The unhacked carpet can then move to a station where the final backing is applied which preferably is from a 100% recycled powder. This material can be applied with the use of a scattering machine or other conventional application device just like the dry adhesive or polymeric pre-coat layer. Preferably, the recycled material powder is applied in an amount of from about 40 to about 150 ounces per square yard, and more preferably from about 70 to about 90 ounces per square yard, and most preferably about 80 ounces per square yard. As described above, the material, once substantially uniformly applied to the unbacked carpet, is then subjected to a fusing process. The carpet can then be subjected to a cooling zone also described previously and then rolled or fed to a cutter.

Referring to Figure 2, an unwinding roll (50) contains release paper or the primary backing of a carpet or other layer which is unwound onto the lower belt (51) of the double belt system (53). A scattering machine (54) scatters powder containing the pre-coat ingredients which can contain recycled powder onto the material being unwound from (50), and the vibrating chute assists in evenly distributing the powder uniformly throughout the layer on the bottom belt. An infrared heater (54) is used to heat pre-coat material to gel or fuse the pre-coat material, and then fiberglass is applied to form a reinforcement layer and a crush roll (55) is used to crush the fiberglass onto the pre-coat layer. Afterwards, a scattering/cooling machine (56) is used to applied the secondary backing layer material which contains at least the recycled powder. Then, a second infrared unit (57) is used to heat the secondary backing material. A series of heating platens (58) is located above the upper belt (60) and below the bottom belt (51) and the heater (59) is used to heat the platens (58). Nip rolls (61) are used to press the material on the belt. Cooling platens (62) are then used above the upper belt (60) and below the bottom belt (51) to cool the material. Finally, a belt cleaning system (63) is used to remove debris from the belts and a rewinding roll (64) is used to roll the finished product.

Figure 3 a) through e) depict various embodiments of the preferred surface covering which is a textile product. In each embodiment in the Figure, fibers (65) are located on top and a secondary backing (70) is located at the very bottom of the covering and a primary backing layer (66) secures the fibers (65). A reinforcement layer (68) can be located beneath the pre-coat layer (67) and/or beneath an intermediate layer (71). An intermediate layer (69) can also be located beneath the reinforcement layer (68). In each case, each layer is affixed in some manner such as by casting, adhesive, or other means conventional in the art.

- 12 -

As an alternative to using the primary backing as the substrate in which all other layers are applied thereto, it is certainly within the bounds of the present invention to make any layer of the surface covering first and then add other desirable layers to the top and/or bottom surface of the first layer made. For instance, the secondary or final backing layer can be made first and then all layers applied thereto.

5 Besides the above embodiment relating to the use of recycled material in one or more layers of a surface covering, another aspect of the present invention is a surface covering wherein the secondary backing layer and preferably the adhesive or polymeric pre-coat layer are made from dry powder blends instead of liquid blends. The advantage with such a system would be that the powder blends are less expensive and are easier to handle in the manufacturing process. In such a process, the layers can be formed in the same manner
10 described above with respect to the formation of a layer using recycled material such that the virgin material forming the secondary backing or other layer will form a continuous layer by fusing or be subjected to sufficient heat to melt the powder to form a continuous layer. The use of the double-belt press described above would be preferred in forming a surface covering containing one or more layers from a dry powder blend. Preferably, the secondary backing would contain a dry blend of a polymeric resin such as polyvinyl
15 chloride along with other optional conventional ingredients in a dry blend form, such as at least one plasticizer, at least one filler, at least one stabilizer, and the like. A foaming agent in the form of a dry blend can also be included. An intermediate backing layer and/or an adhesive or polymeric pre-coat layer can be formed in the same fashion as described earlier. It is within the bounds of the present invention to first form one layer and subject the dry powder blend in the shape of a layer to appropriate heat to form a continuous
20 layer and then add a second layer in powder form to the top or bottom surface of the first formed continuous layer and so on. Alternatively, the layers can all be formed on top of each other in powder form and then subjected at one time to sufficient heat to form a continuous multi-layered surface covering.

Whether a surface covering contains recycled material or 100% virgin material, the process of curing all at one time is particularly preferred in making resilient vinyl flooring where all layers are first formed and
25 then the entire surface covering is subjected to sufficient heat to form a multi-layered resilient vinyl flooring which can then have optional strengthening layers, wear layers and/or top coat layers applied afterwards, such as in the manner described in U.S. Patent No. 5,458,953 incorporated in its entirety by reference herein.

-13-

In combination with the other embodiments of the present invention or as a separate alternative, the recycled material of the present invention can be added to the adhesive and/or pre-coat layer. In this embodiment, the adhesive and/or pre-coat layer are preferably applied as a liquid and the recycled material is added to the liquid in any fashion, such as by mixing with the liquid before the liquid is applied as a coat or the recycled material can be applied by introducing the recycled material on top of the liquid once the liquid is applied as a coat (e.g., applying the recycled material on top of the liquid coat by scattering techniques). Any amount of recycled material can be applied in this fashion, and preferably the amount is from about 1 % by weight of the liquid coat to about 50 % by weight, and more preferably, from about 5 % to about 15 % by weight of the liquid coat. Similarly, any intermediate layer or even the backing layer, such as the ones described above, can have recycled material introduced and present in the same manner (i.e., recycled material added to liquids which form the layer) as a separate alternative; meaning, the backing layer need not contain recycled material as long as some other layer(s) contains recycled material. More than one layer can contain recycled material and preferably, the entire surface covering has from about 1 % by weight to about 20 % by weight recycled material.

The present invention will be further clarified by the following examples, which are intended to be purely exemplary of the present invention.

EXAMPLES

Example 1

A surface covering, such as a final hard backed carpet was made in the following manner. A carpet was made in the same manner as described above with respect to the preferred embodiment of using an adhesive or polymeric pre-coat layer having the formula A described below in Table 1 and the use of a fiberglass fleece (1.0 lb - 2.0 lb/100 ft², e.g. 1.4 lb/100 ft²) obtained from Johns Manville. The unbacked carpet used was a 26 ounce loop obtained from Mannington Carpets - 1/10 gauge. The final or secondary back coat was applied in powder form as shown in Figure 2 using the preferred amounts and parameters described above in the preferred embodiment.

The final back coat was formula R. Formula R is recycled powder resulting from vinyl back carpet tile and carpet waste which was subjected to a face shear operation to remove substantially all of the fiber with a Sellers Shearing Machine. The sheared carpet tile and carpet waste were then fed into a Nordfab 1350K

- 14 -

shredder to form 2" or less granules or chunks which were then reduced to a smaller size of 1/4" or less with the use of a Rapid Granulator 3260. Low density fiber was separated out of the material with a Kongskilde KF-60 aspirator and the material was reduced to a powder having a size of from about 330 microns to about 850 microns. Table 2 below, sets forth the various parameters used in making the carpet which was constructed on a double-belt press obtained from Shilling-Knobel of Germany.

-15-

TABLE I

Formulations		
Co-Polymer Pre-Coat Formulation - (A-Powder)		
Chemical Type	Chemical	PHR
PVC Resin	VC-113	100
Flame Retardant	Aluminum Trihydrate	120
Plasticizers Blend	S-160 (60% by wt.)	22.5
	DINP (40%)	
Stabilizer	Tile	1.5
	Stearic Acid	1.0
Homo-Polymer PVC Back-Coat - (B-Powder)		
PVC Resin	VC 57	100
Filler	CaCO ₃	180
Plasticizer Blend	S-160 (60% by wt.)	60
	DINP (40%)	
Stabilizer	Tile	1.5
	Stearic Acid	1.0
Foam Backing Dry Blend Formulation - (F-Powder)		
PVC Resin	Geon 438	100
Flame Retardant	Aluminum Trihydrate	60
Filler	CaCO ₃	60
Plasticizer Blend	S-160 (60% by wt.)	70
	DINP (40%)	
Stabilizer	Tile	2.0
Foaming Agent	AZ-120	2.4
Activator	Kadox 920	1.0

Table 2										
Carpet Construction	Precoat Type	Precoat Weight gms/m ²	Fiberglass fleece	Back Coat Type	Back Coat Weight gms/m ²	Top Belt Heat	Bottom Belt Heat	Belt Speed m/min	Belt Gap mm	Infrared Both @
26oz Loop	A-Powder	818	Yes	Recycled Granules	2724	215° C	130° C	2	8	50%
26oz Loop	A-Powder	818	Yes	Recycled Granules	2724	215° C	130° C	2	8	70%
26oz Loop	A-Powder	818	Yes	Recycled Granules	2724	215° C	130° C	2	8	60%
26oz Loop	A-Powder	818	Yes	Recycled Granules	1090	215, 205, 195° C	90° C	2	8.5/10	PC 60% BC 50%

Example 2

A vinyl floor covering was made using the process of the present invention. In particular, on a belt, recycled material having Formula R was applied in an amount to create a 40 mil thick layer which on top was applied PVC pellets to form a second layer of 40 mils in thickness. Both layers, in powdered form, were then fused to form a continuous multi-layer product. A top coat containing an UV curable urethane-based acrylate thermoset from Lord Corporation was then applied in the manner described in U.S. Patent No. 5,405,674, incorporated in its entirety by reference herein, to form the final product.

Example 3

A surface covering containing layers made from powder blends was made from using the double-belt press and procedure in Example 1. The process steps of Example 1 were followed except that in lieu of Formula R as the final backing layer, Formula B or Formula F were used to form the final backing layer.

Table 3 below sets forth some results from surface coverings made from Examples 1 and 3.

Table 3

Example	1A	3A	3B	1B
Radiant Panel (ASTM E-648)	.70	-	.78	.56
NBS Smoke FL (ASTM E-662)	474	444	515	435
Tuft Bind Dry (ASTM D-1335)	7.8	9.9	2.5	6.6
Tuft Bind Wet (ASTM D-1335)	6.4	7.4	1.5	5.4
Delamination (ASTM D-3936)	No	No	No	-
Flatness (ITTIL Test-5 means carpet totally "hugs" the floor)	4	-	2-3	4

Other embodiments of the present invention will be apparent to those skilled in the art from consideration of the specification and practice of the present invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the present invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A backing for a surface covering comprising fused recycled material, wherein said recycled material comprises at least one thermoplastic material.
2. The backing of claim 1, wherein said fused recycled material is a fused recycled powder.
3. The backing of claim 1, wherein said surface covering is a carpet.
4. The backing of claim 1, wherein said surface covering is a floor covering.
5. The backing of claim 1, wherein said surface covering is a vinyl surface covering.
6. The backing of claim 1, wherein said surface covering is a hard backed surface covering.
7. The backing of claim 1, wherein said surface covering is a cushion backed surface covering.
8. The backing of claim 1, wherein said recycled material has a particle size of from about 50 microns to about 5,000 microns.
9. The backing of claim 1, wherein said recycled material has a particle size range of from about 50 microns to about 1,000 microns.
10. The backing of claim 1, wherein said thermoplastic material is vinyl-based or derivatives thereof.
11. The backing of claim 1, wherein said recycled material is from a vinyl backed carpet or vinyl backed carpet manufacturing waste or both.
12. The backing of claim 1, wherein said recycled material is pressed.
13. The backing of claim 1, further comprising face fibers, at least one plasticizer, at least one inorganic filler, at least one stabilizer, or mixtures thereof.
14. The backing of claim 1, wherein said backing further comprises nylon fibers, polypropylene fibers, polyester fibers, glass fibers, or mixtures thereof.
15. The backing of claim 1, further comprising virgin thermoplastic material.
16. The backing of claim 1, wherein said backing is for a resilient vinyl flooring material.
17. The backing of claim 1, wherein said backing is for a vinyl carpet tile.
18. The backing of claim 1, wherein said backing is an intermediate backing layer.
19. A surface covering comprising a backing or intermediate layer comprising a fused recycled material, wherein said recycled material comprises at least one thermoplastic material.

20. The surface covering of claim 19, wherein said surface covering is a resilient surface covering, which further comprises a wear surface adhered to the backing or intermediate layer.

21. The surface covering of claim 19, wherein said surface covering is a vinyl floor surface covering, which further comprises a wear surface adhered to the backing or intermediate layer.

22. The surface covering of claim 19, wherein said surface covering is a textile substrate which further comprises a primary backing with textile fibers extending upwardly from the backing and forming a surface and wherein the primary backing is affixed to a surface of the backing or intermediate layer.

23. The surface covering of claim 19, wherein the surface covering is a textile substrate, further comprising a primary backing having textile fibers extending upwardly from the primary backing and forming a surface, an adhesive or polymeric pre-coat layer affixed to the back surface of the primary backing, an intermediate backing layer affixed to the adhesive or polymeric pre-coat layer, a reinforcement material layer or stabilizer layer affixed to the intermediate layer, wherein the backing layer is affixed to the bottom surface of the reinforcement material layer or stabilizer layer and wherein the backing layer or intermediate layer or both comprises a fused recycled material comprising a thermoplastic material.

24. The surface covering of claim 19, wherein said backing layer or intermediate layer or both further comprises virgin thermoplastic material.

25. The surface covering of claim 19, wherein said recycled material comprises carpet backing material or carpet manufacturing waste material or both.

26. The surface covering of claim 19, wherein said backing layer or intermediate layer or both further comprises face fibers, at least one vinyl resin, at least one plasticizer, at least one inorganic filler, at least one stabilizer, or mixtures thereof.

27. The surface covering of claim 19, wherein said recycled material has a particle size of from about 50 microns to about 5,000 microns.

28. The surface covering of claim 19, wherein said recycled material has a particle size of from about 50 microns to about 1,000 microns.

29. The surface covering of claim 19, wherein said fused recycled material is pressed.

- 20 -

30. A method of making a backing for a surface covering comprising applying recycled material in the form of particles on a substrate to form a layer, wherein said recycled material comprises a thermoplastic material;

and fusing said recycled powder to form a continuous backing layer.

31. The method of claim 30, wherein said fusing is achieved with the application of heat and optionally pressure.

32. The method of claim 30, wherein said fusing occurs in a double-belt press.

33. The method of claim 32, wherein the double-belt press comprises a bottom belt and a top belt, wherein said bottom belt is kept at a temperature from between about 110° to about 130°C and said top belt is maintained at a temperature of from about 215° to about 220°C.

34. The method of claim 30, further comprising applying virgin thermoplastic material along with said recycled material to form a layer.

35. A method for preparing a backing for a surface covering comprising reducing vinyl backed carpet, vinyl backed carpet manufacturing waste, or both into granules and fibers;

separating at least a portion of the fibers from the granules;

reducing said granules to a smaller particle size to form a powder;

applying the powder to a substrate to form a layer and pressing said powder;

fusing said powder for a sufficient time and temperature to form a continuous backing.

36. The method of claim 35, wherein prior to reducing the vinyl backed carpet, vinyl backed carpet manufacturing waste, or both to granules, said process further comprises removing at least a portion of any face fiber from said vinyl backed carpet.

37. The method of claim 35, wherein said granules have a size of from about 1/4" to about 3/16".

38. The method of claim 35, wherein said granules are formed by subjecting the vinyl backed carpet, vinyl backed manufacturing waste, or both to a shredder.

39. The method of claim 38, wherein said shredder reduces the vinyl backed carpet or the vinyl backed manufacturing waste to granules having sizes of from about 1" to about 2" wide.

- 21 -

40. The method of claim 35, wherein at least a portion of said fibers are separated from the granules using an aspirator with air stream separation.

41. The method of claim 35, wherein said granules are reduced to a powder by an ambient grinding process or a cryogenic grinding process.

42. The method of claim 35, wherein said substrate is a bottom surface of a primary backing with textile fibers extending upwardly from the primary backing and forming a surface.

43. The method of claim 35, further comprising feeding a roll of primary backing onto a belt prior to applying the powder;

applying dispersion grade or suspension grade thermoplastic resins onto the back of the primary backing to form an adhesive or polymeric pre-coat layer;

vibrating the primary backing;

reducing the adhesive or polymeric pre-coat layer to a soft gel;

placing a reinforcement material on the bottom surface of the adhesive or polymeric pre-coat layer and applying pressure, and wherein the powder is applied onto the bottom surface of the reinforcement material.

44. The method of claim 35, wherein said continuous backing is passed through a cooling zone.

45. The method of claim 35, wherein said fusing occurs on a double-belt press.

46. A method of making a surface covering comprising forming an adhesive or polymeric pre-coat layer onto a primary backing by fusing or melting particles comprising a first thermoplastic material;

forming a secondary backing layer on said adhesive or polymeric pre-coat layer by fusing or melting particles comprising a second thermoplastic material, wherein said first and second thermoplastic material are the same or different.

47. The method of claim 46, wherein said first thermoplastic material and said second thermoplastic material comprises polyvinyl chloride particles.

48. The method of claim 46, wherein prior to forming the secondary backing layer, a reinforcement material is placed in between the adhesive or polymeric pre-coat layer and the secondary backing layer.

- 22 -

49. The method of claim 46, further comprising applying an intermediate layer of particles comprising a thermoplastic material after applying the adhesive or pre-coat layer, and then placing a reinforcement material onto the formed intermediate layer prior to the formation of the secondary backing layer.


50. A surface covering formed from the process of claim 46.

51. A vinyl floor surface covering comprising a substrate comprising fused recycled thermoplastic material and a wear layer comprising cured thermoplastic material.

52. A method of making a vinyl floor surface covering comprising forming a substrate from recycled thermoplastic particles; and applying on a surface of the substrate a wear layer comprising vinyl-based particles; and subjecting the two layers to sufficient heat and optionally pressure to form continuous layers which are adhered to one another.

CONVERSION OF VINYL-BACKED
CARPET INTO RECYCLED POWDER

FIG. 1

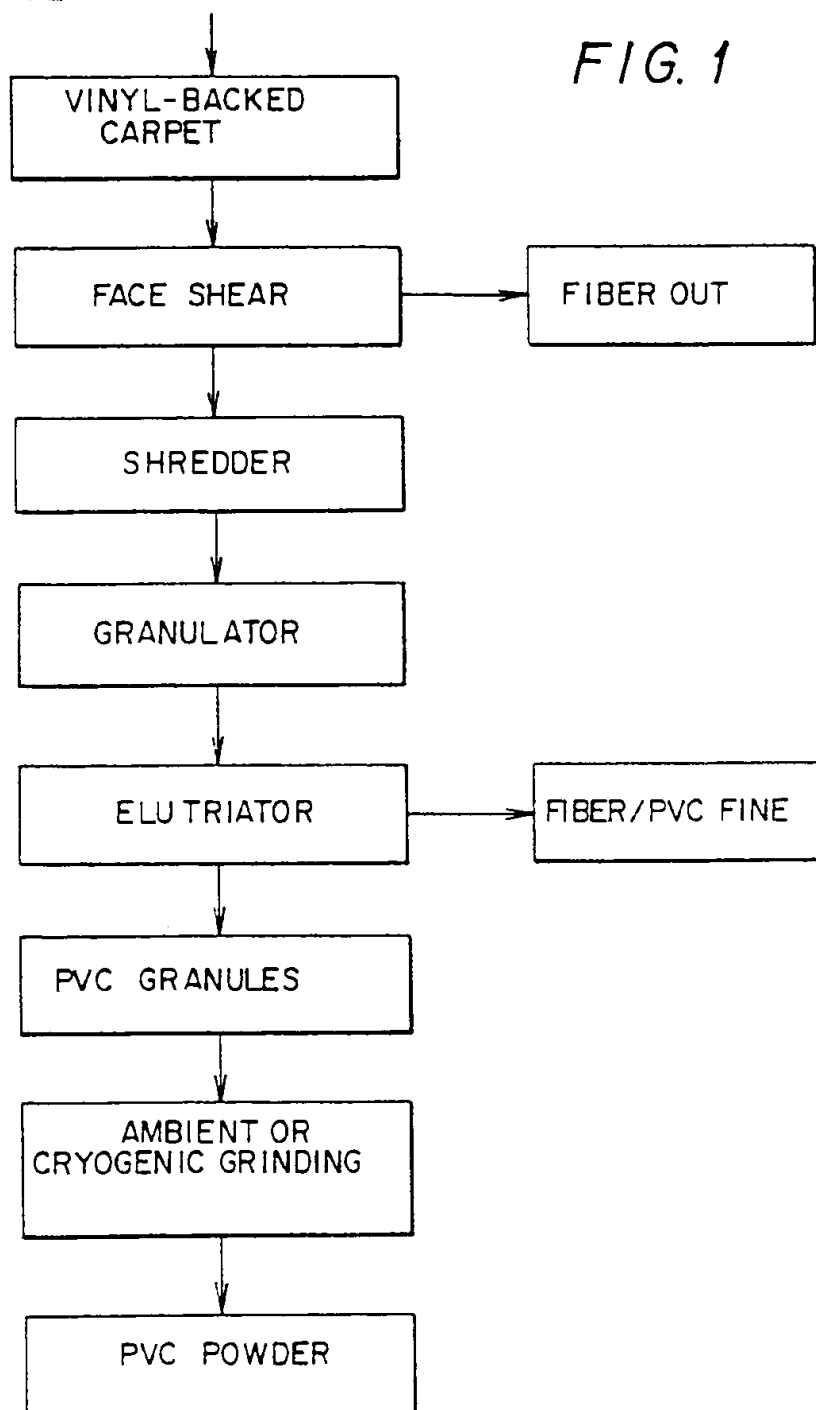






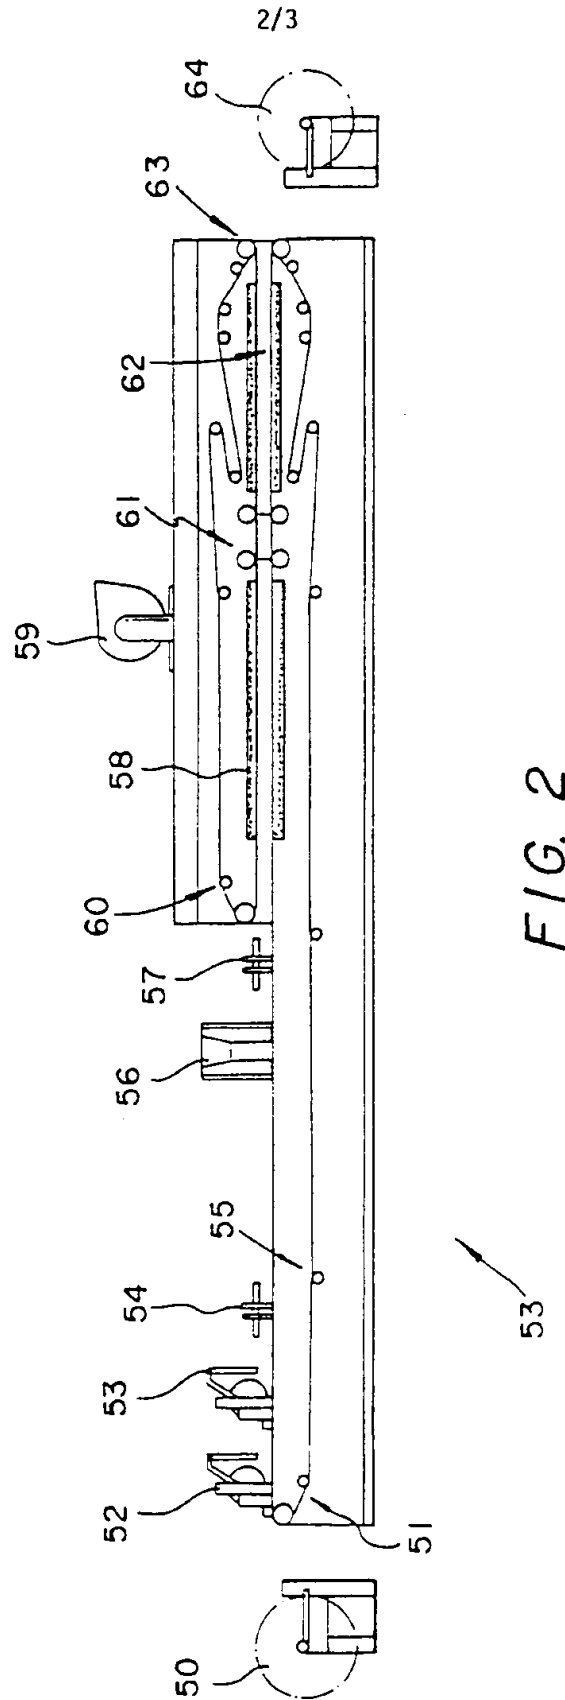


FIG. 2

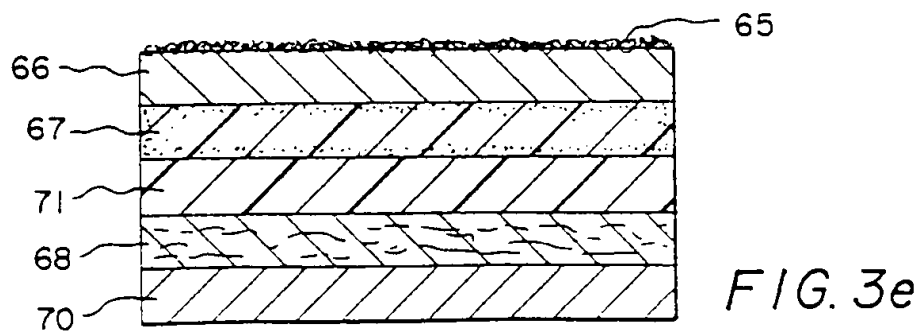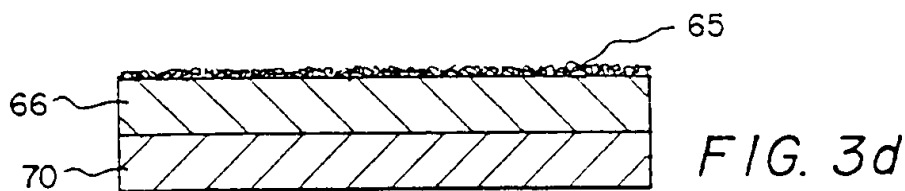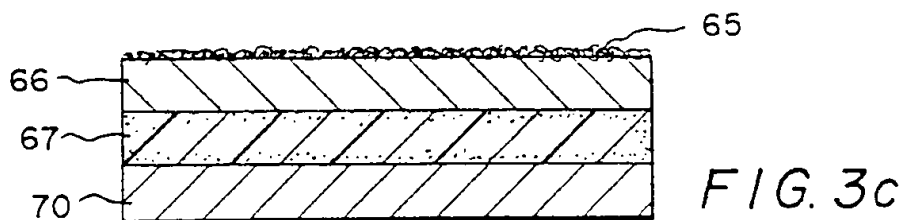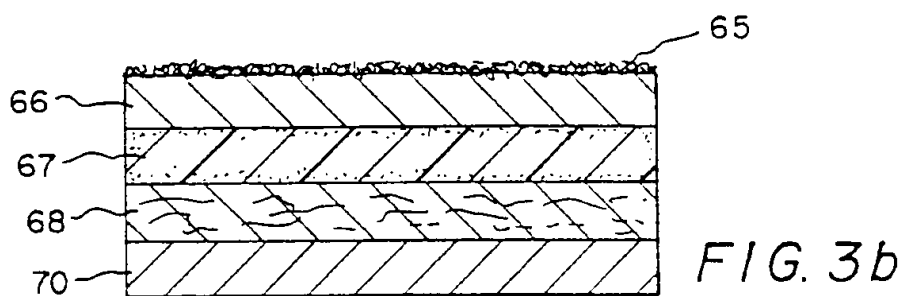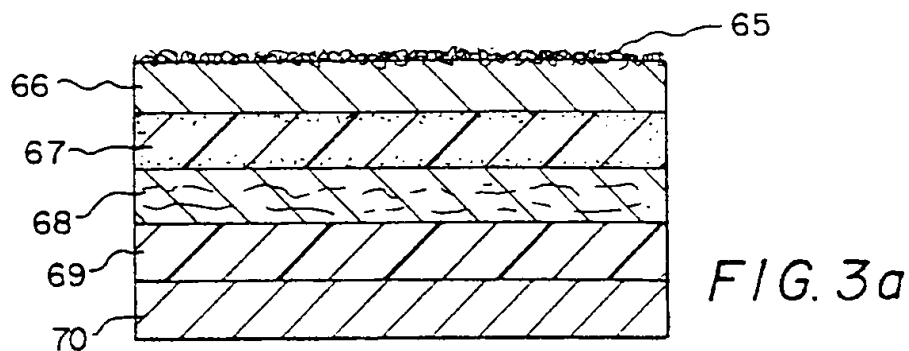

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D06N 7/00, 3/06, B29B 17/00	A3	(11) International Publication Number: WO 99/40250 (43) International Publication Date: 12 August 1999 (12.08.99)
(21) International Application Number: PCT/US99/02182 (22) International Filing Date: 3 February 1999 (03.02.99) (30) Priority Data: 60/073,718 4 February 1998 (04.02.98) US (71) Applicant: MANNINGTON MILLS, INC. [US/US]; Mannington Mills Road, P.O. Box 30, Salem, NJ 08079 (US). (72) Inventors: CHEN, Hao, A.; 40 Blue Stone Drive, Chadds Ford, PA 19317 (US). DESAI, Peter; 15 Ardmore Circle, Cartersville, GA 30120 (US). ZEREBECKI, Nicholas; 202 Teal Road, Mullica Hill, NJ 08062 (US). (74) Agent: KILYK, Luke, A.; Armstrong, Westerman, Hattori, McLeland & Naughton, Suite 1000, 1725 K. Street, N.W., Washington, Dc 20006 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 4 November 1999 (04.11.99)
(54) Title: SURFACE COVERINGS CONTAINING FUSED RECYCLED MATERIAL AND PROCESSES OF MAKING THE SAME (57) Abstract A backing or an intermediate layer for a surface covering is described which comprises a fused recycled material, wherein the material comprises a thermoplastic material, for instance, a vinyl material from a vinyl backed carpet or vinyl backed carpet manufacturing waste or both. Surface coverings containing the backing or intermediate layer of the present invention are also described as well as methods of making the backing or intermediate layer and methods of making the surface coverings containing the backing or intermediate layer of the present invention.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/02182

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D06N7/00 D06N3/06 B29B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 D06N B29B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 095, no. 005, 30 June 1995 (1995-06-30) & JP 07 032520 A (SHINKO KASEI KK), 3 February 1995 (1995-02-03) abstract	1-6, 10, 17-22, 25
Y	abstract	23
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 230 (C-365), 9 August 1986 (1986-08-09) & JP 61 063783 A (KOTOBUKIYA FURONTE KK), 1 April 1986 (1986-04-01) abstract	1-4, 6, 12, 13, 15, 19, 20, 22, 24-26, 29-31, 34

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

15 June 1999

Date of making of the international search report

23. 09. 1999

Name and mailing address of the ISA

European Patent Office, P. B. 5818 Patentplan 2
NL - 2280 HV Rijswijk
Tel.: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

PAMIES OLLE S.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/02182

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 590 189 A (SINCOL CO LTD) 6 April 1994 (1994-04-06) page 2, last paragraph; claims 1,4,5,8 page 3, line 29 - line 44 ---	1-4,6, 13,15, 19,20, 22,24-26
X	EP 0 518 014 A (HUELS CHEMISCHE WERKE AG) 16 December 1992 (1992-12-16) column 3, line 51 -column 4, line 30 page 5, line 11 - line 32 ---	1-4,6, 13-15, 18-20, 22,24-26
X	EP 0 595 063 A (VORWERK CO INTERHOLDING) 4 May 1994 (1994-05-04) column 4, line 42 -column 6, line 48; claims; figures ---	1-4,6,8, 9,13-15, 18-20, 22, 24-28, 30,31,34
X	WO 94 16138 A (BERCOPA SA ;SCHMITZ CLAUDE (LU)) 21 July 1994 (1994-07-21) page 2, line 32 -page 4, line 38 ---	1-4,6, 12,13, 19,20, 22,25, 26,29
X	DE 94 21 584 U (AZO SYNTHETIK FERTIGUNGS UND 8) 11 April 1996 (1996-04-11) page 3, last paragraph -page 4, last line; claims ---	1-4,7, 15, 18-20, 22,24,25
X	ADDEDO A ET AL: "MEHRSCHICHTIGER PP-BELAG FUER AUTOBOEDEN" CHEMIEFASERN TEXTIL-INDUSTRIE, vol. 41, no. 10, 1 October 1991 (1991-10-01), pages 1235-1236, XP000233496 the whole document ---	1-4,6, 15, 18-20, 22,24,25
P,X	EP 0 867 557 A (COLLINS & AIKMAN FLOORCOVERING) 30 September 1998 (1998-09-30) column 2, line 29 - line 56 column 3, line 21 -column 5, line 10 ---	1-4,6, 10,19, 20,22
Y	US 4 689 256 A (SLOSBERG DAVID K ET AL) 25 August 1987 (1987-08-25) column 5, line 64 -column 7, paragraph 1; figures ---	23

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/02182

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DATABASE WPI Section Ch, Week 9302 Derwent Publications Ltd., London, GB; Class A14, AN 93-012678 XP002105974 & JP 04 339645 A (SUMINOE TEXTILE), 26 November 1992 (1992-11-26) abstract</p> <p>---</p>	<p>1,3,4,6, 8,17,19, 20,22, 25,27</p>
A	<p>FR 2 159 418 A (UNIROYAL INC) 22 June 1973 (1973-06-22) claims</p> <p>---</p>	<p>30</p>
A	<p>WO 97 27242 A (INTERFACE RESEARCH ;TERRY C EDWARD (US); HENSLER CONNIE D (US)) 31 July 1997 (1997-07-31) page 1, line 10 -page 2, line 11</p> <p>-----</p>	<p>35,38, 41,42</p>

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 99/ 02182

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see Further Information PCT/ISA/210

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-4, 6-15, 17-20, 22-45

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

1. Claims: 1-4,6-15,17-20,22-45

Carpet comprising a backing containing fused recycled thermoplastic material and method for making it corresponding to claims 1-4,6-15,17-20 and 22-45.

2. Claims: 5,16,21,51,52

surface covering comprising a backing containing the thermoplastic recycled material and a thermoplastic wear layer corresponding to claims 5,16,21,51 and 52.

3. Claims: 46-50

Surface covering comprising a backing of at least two layers of fused thermoplastic material and method for making it corresponding to claims 46-50.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/02182

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 07032520	A	03-02-1995	NONE	
JP 61063783	A	01-04-1986	NONE	
EP 0590189	A	06-04-1994	NONE	
EP 0518014	A	16-12-1992	DE 4117275 A DE 59201812 D ES 2072650 T JP 5254369 A	03-12-1992 11-05-1995 16-07-1995 05-10-1993
EP 0595063	A	04-05-1994	DE 4238196 A AT 183253 T CA 2102023 A DE 59309729 D US 5578648 A	05-05-1994 15-08-1999 01-05-1994 16-09-1999 26-11-1996
WO 9416138	A	21-07-1994	BE 1006624 A BE 1007353 A AU 6955094 A AU 7263594 A WO 9503446 A	03-11-1994 23-05-1995 15-08-1994 20-02-1995 02-02-1995
DE 9421584	U	11-04-1996	NONE	
EP 0867557	A	30-09-1998	US 5855981 A	05-01-1999
US 4689256	A	25-08-1987	US RE34951 E	23-05-1995
JP 4339645	A	26-11-1992	JP 2114314 C JP 7110530 B	06-12-1996 29-11-1995
FR 2159418	A	22-06-1973	BE 772677 A CA 967470 A DE 2146131 A FR 2106598 A GB 1361263 A IT 939821 B BE 790828 A DE 2254196 A FR 2159417 A GB 1412436 A GB 1361890 A IT 1045247 B US 3787259 A	16-03-1972 13-05-1975 23-03-1972 05-05-1972 24-07-1974 10-02-1973 30-04-1973 17-05-1973 22-06-1973 05-11-1975 30-07-1974 10-05-1980 22-01-1974
WO 9727242	A	31-07-1997	AU 1751797 A CN 1214061 A EP 0876425 A NO 983374 A NZ 331450 A PL 327992 A	20-08-1997 14-04-1999 11-11-1998 22-07-1998 30-08-1999 04-01-1999